

# CLUNES

NEW GLASS DOOR



Beautifully modern glass door with better viewing area.


- Efficiently heats medium sized areas
- Modern glass door
- Fan fitted for convection heating
- 6mm steel firebox for durability

FINISH	VHT Black
STAND	Pedestal
FIREBOX	Steel
ESTIMATE PEAK OUTPUT	14.3kW
APPROX. HEAT AREA	150m <sup>2</sup>
EMISSIONS	1.4g/kg
EFFICIENCY	71%
DIMENSIONS (WxDxH)	652 x 524 x 800mm
FIREBOX DIMENSIONS (WxDxH)	450 x 389 x 323mm
LOG SIZE	400mm
WEIGHT	125kg
FLUE SPIGOT SIZE	6"/150mm



Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001.

FLUE SHIELD	A	B	C	D	E	F	G	H
FUF	150	300	300	130	250	329	626	552
AGA	200	300	300	130	150	379	626	452
	I	J	K	L	M	N	R	W
FUF	612	912	974	1425	1224	645	780	652
AGA	612	912	1024	1284	1124	645	639	652

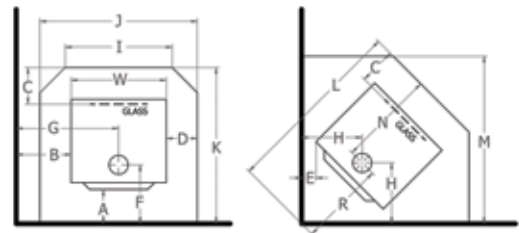

FUF: Flomet Universal Flue system with full length decorative heat shield.

AGA: Acom/Air Group Special Insulated Flue System

